LEGACY: 32A LEVEL 2
TECHNICAL SPECIFICATIONS



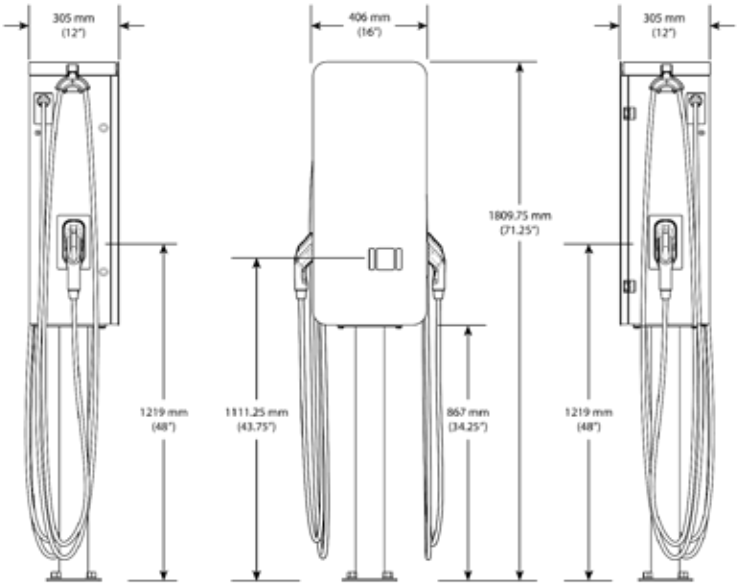

MODEL #	DESCRIPTION
LEG-320	Single Connector Charger
LEG-321	Dual Connector Charger

CERTIFICATIONS
TUV Rheinland UL 2231-1, UL 2231-2, UL 2594

ENERGY STAR- Single and Double Connectors

AC INPUT
Voltage: 208/240 VAC

Breaker: Rating 40A

Single Connector: 3 Wire (L1,L2 & G)

Double Connector: 5 Wire (L1, L1, L2, L2 & G)

AC OUTPUT PER CONNECTOR
7.7 kW at 240VAC

6.6 kW at 208VAC

CHARGE TIME FOR AVERAGE EV WITH 80 kWh CAPACITY GOING FROM 20-80%
6.25 Hours

OPERATING TEMPERATURE
- 20° C to +50° C

- 4° F to +122° F

COMMUNICATIONS
Cellular

Ethernet

DIMENSIONS
71.25" Total Height with Pedestal

36.5" Total Height w/out Pedestal

16" Width Without Connectors

12" Depth

CORD LENGTH
18 feet

PROTOCOL
OCPP 1.6J

CONNECTORS
SAE J1772 Type 1

ENCLOSURE
Type 3R Aluminum

OPTIONS
Wall Bracket

Pedestal Mount

Branded Door Graphics

USER INTERFACE
LED Indicators

RFID Card Reader