



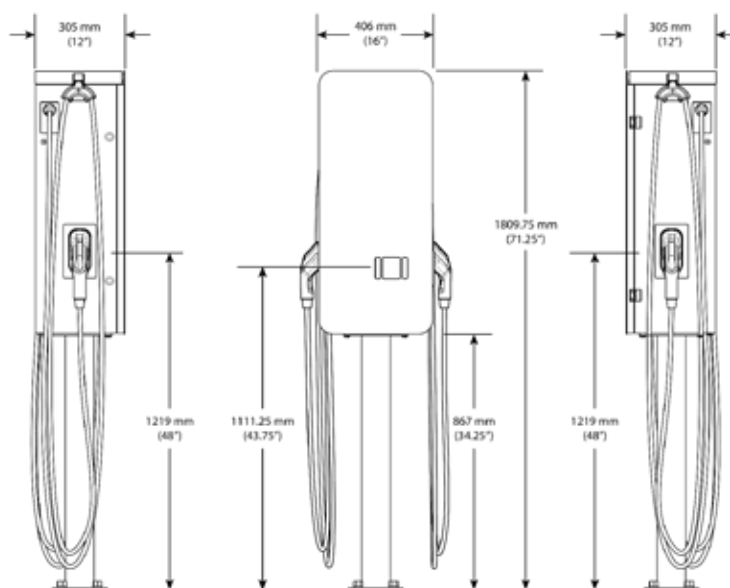

LEGACY: 40A LEVEL 2 TECHNICAL SPECIFICATIONS



MODEL #	DESCRIPTION	DIMENSIONS
JB3.0-401	Single Connector Charger	71.25" Total Height with Pedestal
JB3.0-402	Dual Connector Charger	36.5" Total Height w/out Pedestal
CERTIFICATIONS	TUV Rheinland UL 2231-1, UL 2231-2, UL 2594 ENERGY STAR- Single and Double Connectors	16" Width Without Connectors
AC INPUT	Voltage: 208/240 VAC Breaker: Rating 50A Single Connector: 3 Wire (L1,L2 & G) Double Connector: 5 Wire (L1, L1, L2, L2 & G)	12" Depth
AC OUTPUT PER CONNECTOR	9.6 kW at 240VAC 8.3 kW at 208VAC	
CHARGE TIME FOR AVERAGE EV WITH 80 kWh CAPACITY GOING FROM 20-80%	5 Hours	
OPERATING TEMPERATURE	- 20° C to +50° C - 4° F to +122° F	
COMMUNICATIONS	Cellular Ethernet	
CORD LENGTH	18 feet	
PROTOCOL	OCPP 1.6J	
CONNECTORS	SAE J1772 Type 1	
ENCLOSURE	Type 3R Aluminum	
OPTIONS	Wall Bracket Pedestal Mount Branded Door Graphics	
USER INTERFACE	LED Indicators RFID Card Reader	